

ACE-855A/845V/855C

55 W Open Frame AT
Type



ACE-855A



ACE-845V



ACE-855C

55W

1
Application
Server
Platform

2
Single
Board
Computer

3
IBX Series
POS PC

4
FOLUX
OS
anel PC

5
Video
Capture
Card

5
KAMIO
RISC

7
JYU
Open HMI

8
VITO
Universal
Controller

9
DINO
BLADE

10
LCD
Product
Series

11
Embedded
System

12
Industrial
Computer
Chassis


13
Power
Supply

14
Peripherals

Specifications

Input Type	85 ~ 264 VAC Full Range (ACE-855A), 9.5 ~ 18 VDC (ACE-845V), 16 ~ 32VDC (ACE-855C)				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-855A	8 A	1.2A			
ACE-845V	6 A	1.1 A			
ACE-855C	8 A	1.2 A			
Efficiency	70 %				
Temperature	ACE-855A/855C: 0 °C~ 60°C (Operating), -20 °C~ 85°C (Storage) ACE-845V: 0 °C~ 50°C (Operating), -20 °C~ 85°C (Storage)				
MTBF(hrs)	335,000 (ACE-855A), 364,000 (ACE-845V), 358,000 (ACE-855C)				
Output Connector	Optional Cable				
Dimensions	177.5 x 50.5 x 37 (mm)				

Dimensions

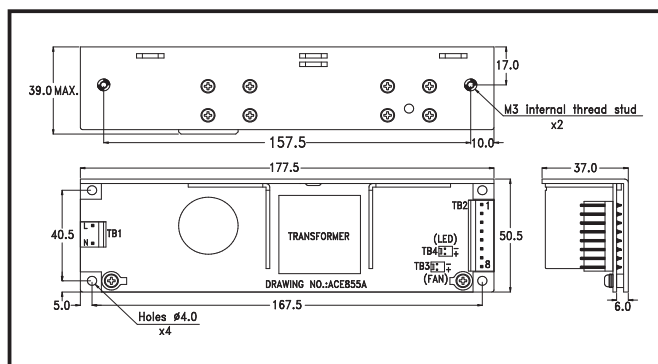

Ordering Information

- **ACE-855A-RS**
55W AC-DC Open Frame AT Power Supply
- **ACE-845V-RS**
42W 12V DC Input Open Frame AT Power Supply
- **ACE-855C-RS**
55W 24V DC Input Open Frame AT Power Supply



Optional 1 AC Input Solution

PN: CB-855EC-RS

20 cm AC input cable with fuse



Optional 2 Embedded Solution

PN: CB-855EB-RS

30 cm DC cable to CPU card,
with 20-pin ATX, HDD and SATA
connectors



Optional 3 ATX Backplane Solution

PN: CB-855BP-RS

30 cm DC cable to backplane,
with 20-pin ATX, HDD and SATA
connectors



Optional 4 AT P8P9 Backplane Solution

PN: CB-855P8P9-RS

30 cm DC cable AT power
to P8P9, HDD and SATA
connectors



12V only connector



ATX backplane connector



IDE device connector



SATA device connector

