

FSP120AAB

120 W AC/DC Adapter



120W




Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 19 V
- Output Current: 6.32 A
- Output Watts: 120 W
- Efficiency: 86 %
- Operating Temperature: 0 °C ~ 50 °C
- Storage Temperature: -40 °C ~ 85 °C

Ordering Information

Part No.	Description
63000-FSP120AAB-RS	19 V 120W Power adapter; 90~264 Vac input

Dimensions

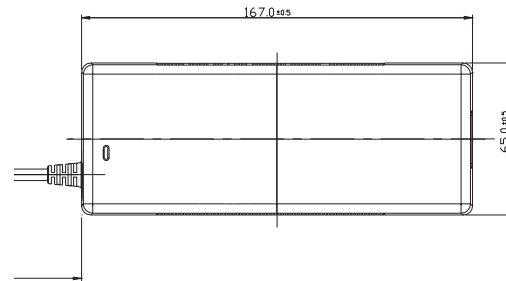


Optional Cable



PN: CB-MD4P4-RS
20 cm cable for power mini-DIN connector adapter

Connector Type



Plug Type: Power mini-DIN(4P)

FSP0601AD101C

60 W AC/DC Adapter



60W




Specifications

- Input Voltage Range: 90-264 VAC
- Input Frequency: 47-63 Hz
- Output Voltage: 12 V
- Output Current: 5 A
- Output Watts: 60 W
- Efficiency: 80 %
- Operating Temperature: 0 °C ~ 40 °C
- Storage Temperature: -20 °C ~ 65 °C

Ordering Information

Part No.	Description
63000-FSP0601AD101C712-RS	12 V 60 W Power adapter with lock screw; 90~264 Vac input

Dimensions

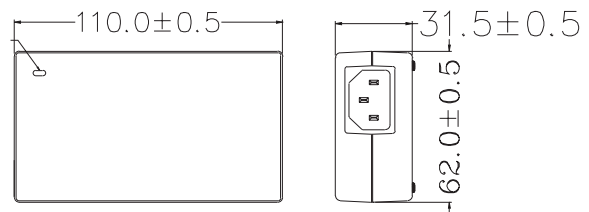

Optional Cable



PN: CB-P1LP4-RS
20 cm cable for 5.5 X 2.5 DC Plug with screw

Connector Type



Plug Type: øin 2.5 mm / øout 5.5 mm

1

Application Server Platform

2

Single Board Computer

3

IBX Series POS PC

4

AFOLUX POS Panel PC

5

Video Capture Card

6

KAMIO RISC

7

IOVU Open HMI

8

VITO Universal Controller

9

DINO BLADE

10

LCD Product Series

11

Embedded System

12

Industrial Computer Chassis

13

Power Supply

14

Peripherals