
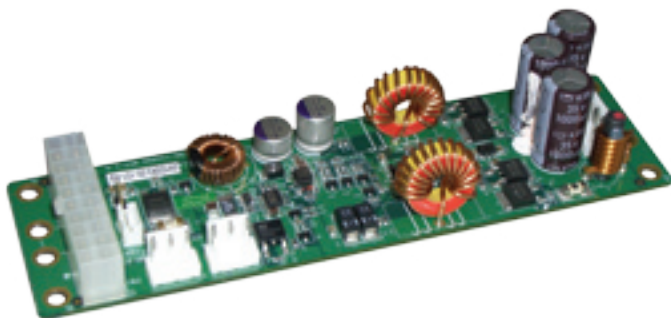


IDD-12490A *90 W+120 W DC/DC Converter Module*

1
Application
Server
Platform2
Single
Board
Computer3
IBX Series
POS PC4
AFOLUX
POS
Panel PC5
Video
Capture
Card6
KAMIO
RISC7
IOVU
Open HMI8
VITO
Universal
Controller9
DINO
BLADE10
LCD
Product
Series11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Specifications

- Output (max.): 12 V@10 A (pass thru.), 5 V@10 A, 3.3 V@8 A, -12 V@0.3 A & 5 VSB@2A
Max. total output: 90 W plus 120 W (12 V pass thru.)
- Input: 12 VDC
- Performance characteristics
 - Noise & ripple: <120 mV
 - Load regulation: <60 mV
 - Efficiency: Up to 90%
- Dimensions: 45 mm x 160 mm
- Weight: NW: 82 g
- Operating temperature: -20°C ~ 70°C



PIN Assignments

Input Power Connector

CN1	Pin 1	Pin 2	Pin 3	Pin 4
	Vin	Vin	GND	GND

Output Power Connector

CN2 CN3	Pin 1	Pin 2	Pin 3
	+5 V	GND	+12 V
PW1	Standard 20-pin ATX		

ATX Mode Connector

CN4	Pin 1	Pin 2	Pin 3
	5 VSB	GND	PS_ON

Wire Harness Selection Guide

DC Input (CN1)



Options 1.

PN: **CB-P1LP4-RS**

Cable for FSP0601AD101C 60 W/
UP0451E12P 45 W/UP0251E12PL
25 W AC-DC adapter



Options 2.

PN: **CB-MD4P4-RS**

Cable for 63000-FSP120AAB-RS
120 W AC-DC adapter



Options 3.

PN: **CB-NOLP4-RS**

Cable for terminal block

SBC Main Power (PW1)



Options 1.


PN: **CB-ATX20P-RS**

20-pin ATX to 20-pin ATX cable

Features

- 90 W + 120 W (12 V Pass Thru); total power 210 W
- AT or ATX mode on/off
- Up to 90% efficiency
- RoHS compliant
- Compact size

Dimensions (Millimeters)

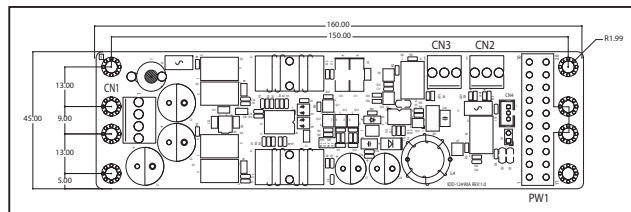

Packing information

1 x IDD-12490A

1 x QIG

Ordering Information

Part No.	Description
IDD-12490A-R10	90 W + 120 W DC/DC 12 V input; 12 V, 5 V, 3.3 V, -12 V & 5 VSB output
CB-JST3PSW-RS	30 cm cable on/off switch
CB-JST3P001-RS	30 cm 5 VSB, PS_ON wire to SBC
CB-3PSATA-RS	10 cm cable for SATA power
CB-3PIDE-RS	10 cm cable for IDE HDD power
CB-P1LP4-RS	20 cm cable for FSP0601AD101C 60 W/ UP0451E12P 45 W/UP0251E12PL 25W AC-DC adapter
CB-MD4P4-RS	20 cm cable for 63000-FSP120AAB-RS 120 W AC-DC adapter
CB-NOLP4-RS	20 cm cable for terminal block DC input
CB-ATX20P-RS	30 cm 20-pin ATX to 20-pin ATX cable

I/O Power (CN2 & CN3)



Options 1.

PN: **CB-3PSATA-RS**
Cable for SATA



Options 2.

PN: **CB-3PIDE-RS**
Cable for IDE HDD or any STD
4-pin I/O devices

Power On/Off (CN4)



Options 1.

PN: **CB-JST3PSW-RS**
Cable with on/off switch



Options 2.

PN: **CB-JST3P001-RS**
Cable to SBC (5 VSB & PS_ON)