

Mustang-F100-A10



Feature

- Half-Height, Half-Length, Double-slot.
- Power-efficiency, low-latency.
- Supported OpenVINO™ toolkit, AI edge computing ready device.
- FPGAs can be optimized for different deep learning tasks.
- Intel® FPGAs supports multiple float-points and inference workloads.



Specifications

Model Name	Mustang-F100-A10
Main FPGA	Intel® Arria® 10 GX1150 FPGA
Operating Systems	Ubuntu 16.04.3 LTS 64-bit, CentOS 7.4 64-bit Ubuntu 18.04.x LTS 64bit, CentOS 7.4 64bit, (Windows® 10 64bit & more OS are coming soon)
Voltage Regulator and Power Supply	Intel® Enpirion® Power Solutions
Memory	8G on board DDR4
Dataplane Interface	PCI Express x8 Compliant with PCI Express Specification V3.0
Power Consumption	Approximate 40W
Operating Temperature	5°C~60°C
Cooling	Active fan
Dimensions	Standard Half-Height, Half-Length, Double-slot
Operating Humidity	5% ~ 90%
Power Connector	*Preserved PCIe 6-pin 12V external power
Dip Switch/LED indicator	Identify card number
Support Topology	AlexNet; DenseNet-121, -161, -169, -201; GoogLeNet v1, v2, v3, v4; Inception v1, v2, v3, v4; LSTM: CTPN MobileNet v1, v2; MobileNet SSD; MTCNN-o, -p, -r; ResNet-18, -50, -101, -152; ResNet v2-50, -101, -152 Sphereface; SqueezeNet v1.0, v1.1; SSD MobileNet v1, v2; SSD Inception v2, v3; SSD ResNet; SSD300 SSD512; U-Net; VGG16, VGG19; YoloTiny v1, v2, v3; Yolo v2, v3 * For more topologies support information please refer to Intel® OpenVINO™ Toolkit official website. [Supported Models] https://docs.openvino toolkit.org/latest/_docs_IE_DG_Introduction.html#SupportedFW [Supported Framework Layers] https://docs.openvino toolkit.org/latest/_docs_MO_DG_prepare_model_Supported_Frameworks_Layers.html

*TANK AIoT dev. kit PCIe slot provides 75W power, this feature is preserved for user in case of different system configuration.

Warning: DO NOT install the Mustang-F100-A10 into the TANK AIoT Dev. Kit before shipment. It is recommended to ship them with their original boxes to prevent the Mustang-F100-A10 from being damaged.

Ordering Information

Part No.	Description
Mustang-F100-A10-R10	PCIe FPGA Highest Performance Accelerator Card with Arria 10 1150GX support DDR4 2400Hz 8GB, PCIe Gen3 x8 interface
7Z000-00FPGA00	7Z0-OTHERS PERIPHERAL DEVICE;FPGA Download Cable; IEI USB DOWNLOAD CABLE;GALAXY;USB Download+USB CABLE+IDE CABLE+FPGA CABLE


*Due to the OpenVINO™ toolkit version is upgraded periodically, IEI strongly recommend users to purchase FPGA programmer kit (7Z000-00FPGA00) to upgrade the latest bitstreams to get best performance.

*If you would like to buy FPGA Download Cable kit(7Z000-00FPGA00), please email to online@ieiworld.com or place an order on IEI USA e-shop, thank you.

Packing List

- 1 X Full height bracket
- 1 x External power cable
- 1 x QIG

Scalable FPGA Deep Learning Acceleration Add-in Card

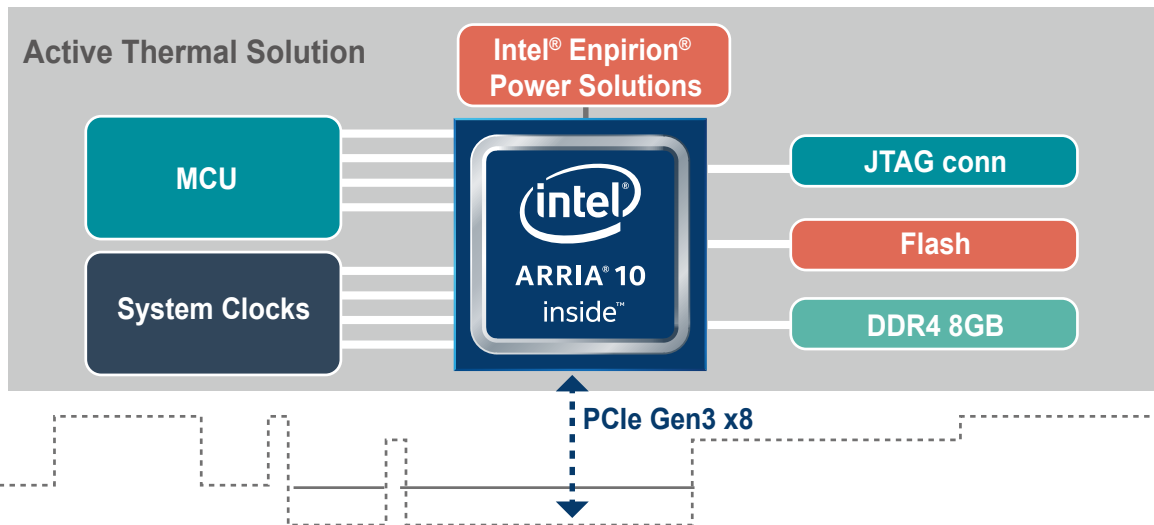

Mustang-F100-A10 Block Diagram

- Intel® Arria® 10 1150 GX FPGAs delivering up to 1.5 TFLOPs
- Interface: PCIe Gen3 x 8
- Form Factor: Standard Half-Height, Half-Length, Double-slot
- Cooling: Active fan.
- Operation Temperature : 5°C~60°C
- Operation Humidity : 5% to 90% relative humidity
- Power Consumption: Approximate 40W
- Power Connector: *Preserved PCIe 6-pin 12V external power
- DIP Switch/LED Indicator: Identify card number.
- Voltage Regulator and Power Supply: Intel® Enpirion® Power Solutions

Mustang-F100-A10 Dimensions (Unit: mm)

