

# Power Supply *1U AC Input ATX Type*


## ACE-A622A

Product	ACE-A622A-RS					
Input Type	90~264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	+12 V 2	-12 V	+5 Vsb
	14 A (0.5 A min.)	16 A (0.5 A min.)	16 A (1 A min.)	10 A (1 A min.)	0.8 A (0 A min.)	2.5 A (0 A min.)
Efficiency	80 %					
Temperature	Operating : 0 °C~ 50 °C, Storage : -20 °C~ 80 °C					
MTBF(hrs)	100,000 hr					
Output Connector	20-pin ATX, 4-pin 12 V, 3 x HDD and 1 x FDD					
Dimensions	150 x 81.5 x 40.5 (mm)					

**PFC**


**NEW**

**80 PLUS**



### Dimensions

**220W**

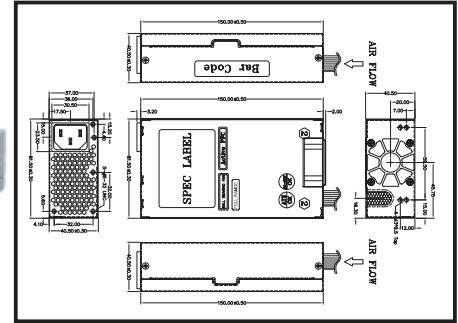

### Ordering Information

Part No.	Description
ACE-A622A-RS	220W AC-DC 1U flex ATX Power Supply , with PFC

1 Application Server Platform

2 Single Board Computer

3 iBX Series POS PC

4 AFOLUX POS Panel PC

5 Video Capture Card

## ACE-720APM *Medical*

Input Type	85 ~ 264 VAC Full Range					
Output Voltage	+3.3 V	+5 V	+12 V	-5 V	-12 V	+5 Vsb
		20 A (2 A min.)	9 A		0.5 A	0.5 A
Efficiency	82 %					
Temperature	Operating : 0 °C~ 70 °C (50 °C~ 70 °C derating curve) Storage : -20 °C~ 85 °C					
MTBF(hrs)	100,000					
Output Connector	+5Vsb & PS on cable					
Dimensions	198 x 97 x 39 (mm)					

**PFC**




+5Vsb & PS On cable



### Dimensions

**220W**

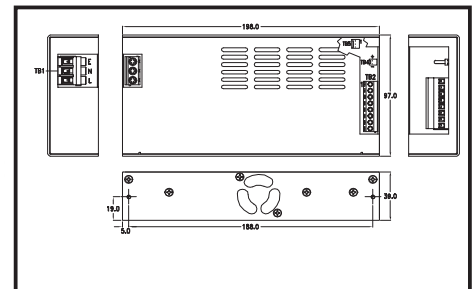

### Ordering Information

Part No.	Description
ACE-720APM-RS	200W AC-DC 1U ATX Power Supply with PFC, meet Medical standard

6 KAMIO RISC

7 IOVU Open HMI

8 VITO Universal Controller


9 DINO BLADE

## ACE-A618A

Product	ACE-A618A-RS				
Input Type	90~264 VAC Full Range				
Output Voltage	+3.3 V	+5 V	+12 V	-12 V	+5 Vsb
	14 A (0.3 A min.)	16 A (0.3 A min.)	14 A (1.5 A min.)	0.5 A (0 A min.)	2.0 A (0 A min.)
Efficiency	68 %				
Temperature	Operating : 0 °C~ 50 °C Storage : -20 °C~ 80 °C				
MTBF(hrs)	100,000 hr				
Output Connector	20-pin ATX x1, 4-pin 12V CPU x 1, HDD x 3, FDD x 1				
Dimensions	150 x 81.5 x 40.5 (mm)				


**PFC**

**NEW**



### Dimensions

**180W**

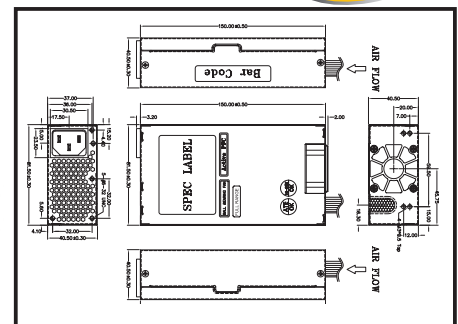

### Ordering Information

Part No.	Description
ACE-A618A-RS	180WAC-DC 1U flex ATX Power Supply , with PFC

11 Embedded System

12 Industrial Computer Chassis

13 Power Supply

14 Peripherals